

VOYAGER™ XP

Durable, Highly Accurate 2D Scanner

Accessories Guide



Honeywell

TABLE OF CONTENTS

- 3 Battery and battery chargers
- 3 Access points, communication base and charger
- 4 Power supplies for cabled connections and charge/communication bases
- 5 Cables/stands



BATTERY AND BATTERY CHARGERS



BAT-SCN05

Smart Battery Pack

Smart Battery: Lithium-ion battery for Xenon™ XP 1952, Voyager™ XP and Granit™ XP 1991i wireless scanners.



MB4-BAT-SCN01XXD06¹

4-Bay Battery Charger-Desk Mount

4-bay battery charger for use with Granit, Xenon and Voyager Lithium-ion batteries, desktop power supply, two mounting screws (100006897), and instructions (MBC-INST).



MB4-BAT-SCN01XXW06¹

MB4-BAT-SCN01XXW06

4-bay battery charger for use with Granit, Xenon and Voyager lithium-ion batteries, wall mount power supply, two mounting screws (100006897), and instructions (MBC-INST).

ACCESS POINTS, COMMUNICATION BASE AND CHARGER



AP-100BT-07N

Bluetooth® Access Point

Access point for scanners. Class 1 Bluetooth, 100m(330'), RS232/USB/KBW/IBM (cable sold separately).



AP-010BT-07N

Bluetooth Access Point

Access point for scanners. Class 2 Bluetooth, 10m (33'), RS232/USB/KBW/IBM (cable sold separately).



CCB01-010BT-VIN

Voyager Charge and Communication Base

Charge & Communication, Bluetooth, Typical 10m, 1 scanner can be connected, RS232/USB/KBW/IBM host interfaces (cables sold separately).



COB01

Charge Only Base

Charge-Only Base: Only 1 scanner can be charged at a time, power supply must be purchased separately.

¹ Indicates characters designating regional configuration

POWER SUPPLIES FOR CABLED CONNECTIONS AND CHARGE/COMMUNICATION BASES



46-00525-6

Power Supply – NA Plug

Power Supply: NA plug,
1.0A @ 5.2V DC, 90-
255V AC @ 50-60Hz.



46-00526

Power Supply – EU Plug

Power Supply: EU plug,
1.0A @ 5.2V DC, 90-
255V AC @ 50-60Hz.



46-00528

Power Supply – AU Plug

Power Supply: AU plug,
1.0A @ 5.2V DC, 90-
255V AC @ 50-60Hz.




46-00529


Power Supply – CN Plug

Power Supply: CN plug,
1.0A @ 5.2V DC, 90-
255V AC @ 50-60Hz.

Power supplies for cabled connections

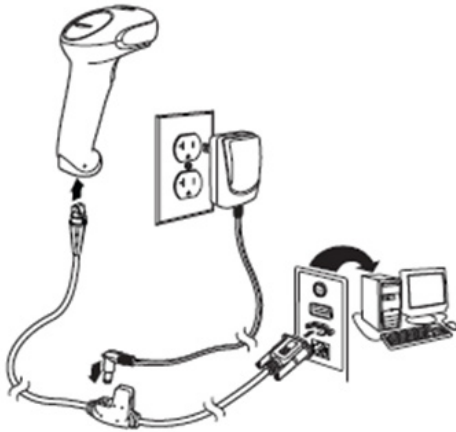

Power supplies for charge/communication bases

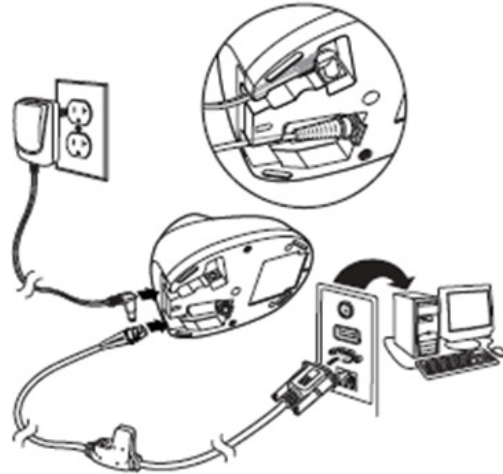

CABLES

| | | | | |
|--|---|--|---|--|
| CBL-020-300-C00 | CBL-020-500-C00 | CBL-500-150-S00 | CBL-500-300-S00 | CBL-500-300-C00 |
| RS-232 Power Cable Cable: RS232(5V signals), black, DB9 Female, 3m (9.8'), coiled, 5V external power with option for host power on pin 9, w/o ferrite. | RS-232 Power Cable Cable: RS232(5V signals), black, DB9 Female, 5m (16'), coiled, 5V external power with option for host power on pin 9, w/o ferrite. | USB Power Cable Cable: USB, Black, Type A, 1.5m(4.9'), Straight, 5V host power, w/o ferrite. | USB Power Cable Cable: USB, black, Type A, 3m (9.8'), Straight, 5V host power, w/o ferrite. | USB Power Cable Cable: USB, black, Type A, 3m (9.8'), coiled, 5V host power, w/o ferrite. |
| CBL-500-500-C00 | CBL-500-500-S00 | CBL-500-400-C00-01 | CBL-800-300-C00 | CBL-503-300-C00 |
| USB Power Cable Cable: USB, black, Type A, 5m (16.4'), coiled, 5V host power, w/o ferrite. | USB Power Cable Cable: USB, black, Type A, 5m (16.4'), straight, 5V host power, w/o ferrite. | USB Power Cable Cable: USB, black, Type A, 4m (13.1'), coiled, 5V host power, w/o ferrite. | USB Power Cable Cable: USB, Type C, black, 3m (9.8'), coiled, 5V host power, w/o ferrite. | USB Power Cable Cable: USB, black, 12V locking, 3m (9.8'), coiled, 5V host power, w/o ferrite. |
| CBL-503-300-S00 | CBL-503-500-C00 | CBL-720-300-C00 | | |
| USB Power Cable Cable: USB, black, 12V locking, 3m (9.8'), straight, 5V host power, w/o ferrite. | USB Power Cable Cable: USB, black, 12V locking, 5m (16.4'), coiled, 5V host power, w/o ferrite. | KBW Power Cable Cable: KBW, black, PS2, 3m (9.8'), coiled, 5V external power with options for host power, w/o ferrite. | | |

STANDS



STND-15F03-009-6

Voyager™ XP 1470g Stand

Stand: gray, 15cm (6") height, flexible rod, medium oval weighted base, Voyager 1250g/1470g cup.



STND-15R00-009-6

Voyager XP 1470g Stand (Rigid)

Stand: gray, 6in, rigid, cradle, 1470g.

For more information

sps.honeywell.com

Honeywell Safety and Productivity Solutions

855 S Mint St
 Charlotte, NC 28202
 800-582-4263
www.honeywell.com

Granit, Voyager, and Xenon are trademarks or registered trademarks of Honeywell International Inc.

Bluetooth is a trademark or registered trademark of Bluetooth SIG, Inc. All other trademarks are the property of their respective owners.

Voyager XP 2D Scanner Accessories Guide | Rev A | 04/23
 © 2023 Honeywell International Inc.